

# ECE 102 Midterm

Ri Xin Wang

TOTAL POINTS

**92 / 106**

QUESTION 1

Signal/System/Convolution 35 pts

1.1 (a)i 5 / 5

✓ + 5 pts Correct

+ 4 pts Correctly computed periods of both signals and its ratio, but with insufficient justification

+ 2 pts Attempted to justify the signal is not periodic, with insufficient or incorrect justification

+ 3.5 pts Stated no common period, without computing or mentioning the ratio of periods

+ 0 pts Incorrect answer or no Justification

1.2 (a)ii 0 / 5

+ 5 pts Correct

✓ + 0 pts Incorrect answer or no/incorrect justification

+ 2 pts Insufficient Reasoning to justify the answer

1.3 (a)iii 5 / 5

✓ + 5 pts Correct answer

+ 3 pts One side is simplified correctly

+ 1.5 pts Correctly used the sifting property on the right hand side

+ 1.5 pts Correctly used the sampling property on the left hand side

+ 0 pts Incorrect answer or reasoning

1.4 (b) 10 / 10

✓ + 10 pts Correct

+ 5 pts Correctly identify the linearity property

+ 0 pts Incorrect

1.5 (c) 10 / 10

✓ + 10 pts Correct  $h(t)$

+ 8 pts Correct  $h(t)$  for  $t < 2$

+ 8 pts Correct shape of  $h(t)$  but incorrect amplitude

+ 2 pts correct  $h(0)$

+ 2 pts correct  $h(1/4)$

+ 2 pts correct  $h(5/8)$

+ 2 pts Correct  $h(t)$  for  $t > 2$

+ 0 pts Incorrect

QUESTION 2

LTI Systems 20 pts

2.1 (a) 4 / 4

✓ - 0 pts Correct

- 1 pts minor mistakes

- 2 pts half correct

- 4 pts incorrect

2.2 (b) 8 / 10

✓ + 3 pts use LTI properties.

✓ + 3 pts correct convolution equation/multiplication in frequency domain.

✓ + 2 pts correct convolution results/inverse FT results.

+ 2 pts correct time shift for the last step.

+ 0 pts incorrect

① please don't skip steps next time

2.3 (c) 6 / 6

✓ - 0 pts Correct.

- 1 pts constant term incorrect.

- 2 pts time shift incorrect.

- 2 pts inverse FT incorrect.

- 3 pts missing/incorrect exponential/unit step function.

- 4 pts calculate in frequency domain with wrong FT.

- **5 pts** incorrect calculation with a correct convolution equation.
- **6 pts** incorrect.

### QUESTION 3

## Fourier Series 20 pts

### 3.1 (a) 10 / 10

- ✓ - **0 pts** Correct
- **0.5 pts** Did not explicitly use the angular frequency  $\omega_g = a\omega_0$ , or  $T_g = T_0/a$  in the Fourier Series.
- **5 pts** Partially correct
- **7.5 pts** Incorrect
- **10 pts** See comment
- **10 pts** No substantive answer

### 3.2 (b) 9 / 10

- **0 pts** Correct
- ✓ - **1 pts** Did not mention divisibility of  $k$  by  $m_1$  and  $m_2$
- **6.5 pts** Incorrect
- **10 pts** See comment
- **2 pts** Missing alphas or different scale factor (that does not contain  $t$ , since it shouldn't)
- **2 pts**  $k$  or  $m_k$  instead of  $k/m$
- **10 pts** No substantive answer

### QUESTION 4

## Fourier Transform 25 pts

### 4.1 (a) 10 / 10

- ✓ + **10 pts** Correct
- + **5 pts** Attempted to use inverse FT formula and did many correct algebraic steps.
- + **3 pts** Wrote equation of Fourier Transform but did not substitute  $\omega = 0$
- + **2 pts** Attempted integral incorrectly, or other attempted math with Fourier transform (either of rect/sincs, or inverse FT).
- + **2 pts** Explanation of property with no proof, or applying it to  $\text{sinc}(2t)$  incorrectly.

- + **0 pts** Incorrect or no answer

### 4.2 (b) 5 / 5

- ✓ + **5 pts** Correct, with Fourier Transform taken correctly.
- + **4 pts** Took the Fourier Transform correctly, did not calculate an area or did so incorrectly.
- + **2 pts** Did not compute Fourier transform of  $\text{sinc}(2t)$  correctly, or other incorrect algebra.
- + **0 pts** No appropriate work for partial credit or answer.

### 4.3 (c) 5 / 5

- ✓ + **5 pts** Correct,  $\omega_0 > 2\pi$ , or correct based on their answer to part (b).
- + **4.5 pts** Mistake on the amount of shift (e.g.,  $4\pi$  instead of  $2\pi$ ; or did not plug in  $\omega = 0$ ; or did not specify the shift precisely).
- + **3.5 pts** Recognize the FT is time-shifted, did not correctly deduce when rect is 0 or other incorrect algebra.
- + **3 pts** Recognized the FT is time-shifted.
- + **2 pts** Incorrect answer due to incorrect rationale, or work appropriate for partial credit (such as showing some conditions where it's zero).
- + **0 pts** No appropriate work for partial credit, or no answer.

### 4.4 (d) 5 / 5

- ✓ + **5 pts** Correct,  $\alpha = -1/2$ , or correct based on their answer to parts b or c. We required you to simplify to a number since we asked for a value -- it wasn't sufficient to keep things in terms of rects and sincs.
- + **4 pts** Would have had the correct answer if recalled  $\text{sinc}(0) = 1$  or other minor algebraic constant.
- + **3 pts** Didn't simplify  $\text{rect}(0)$  or  $\text{sinc}(0)$ , but had the correct (or reasonable) equation; or other related error.
- + **2 pts** Incorrect answer due to not treating the rect  $\leftrightarrow$  sinc term correctly, or other partial work.
- + **1 pts** Attempt to simplify the integral with incorrect

arguments; or other incorrect / incomplete arguments.

+ **0 pts** No appropriate work for partial credit, or no answer.

QUESTION 5

**5 Bonus 0 / 6**

- **0 pts** Correct for intended interpretation

✓ - **6 pts** No answer or incorrect justification or no justification

- **3 pts** Partially correct

- **5 pts** If "any" was interpreted as "some" rather than "every": correct example of some causal system

S

- **6 pts** See comment

**ECE102, Fall 2019**

Department of Electrical and Computer Engineering  
University of California, Los Angeles

**Midterm**

Prof. J.C. Kao  
TAs: W. Feng, J. Lee & S. Wu

UCLA True Bruin academic integrity principles apply.

Open: Two cheat sheets allowed.

Closed: Book, computer, internet.

2:00-3:50pm.

Wednesday, 13 Nov 2019.

State your assumptions and reasoning.

No credit without reasoning.

Show all work on these pages.

There is an extra blank space on page 16 to show your work if you run out of space on any questions.

Name: Rixin Wang

Signature: Wj

ID#: 305088388

Problem 1	_____ / 35
Problem 2	_____ / 20
Problem 3	_____ / 20
Problem 4	_____ / 25
BONUS	_____ / 6 bonus points
Total	_____ / 100 points + 6 bonus points

1. Signal and System Properties + Convolution (35 points).

(a) (15 points) Determine if each of the following statements is true or false. Briefly explain your answer to receive full credit.

i. (5 points)  $x(t) = \cos(\sqrt{3}t) + \sin(-3t)$  is a periodic signal.

$$x(t) = \underbrace{\cos(\sqrt{3}t)}_{x_1(t)} - \underbrace{\sin(3t)}_{x_2(t)}$$

$$w_{x_1} = \sqrt{3} \quad w_{x_2} = 3$$

$$\frac{2\pi}{T_1} = \sqrt{3} \quad \frac{2\pi}{T_2} = 3$$

$$T_1 = \frac{2\pi}{\sqrt{3}} \quad T_2 = \frac{2\pi}{3}$$

False //

$$\frac{T_1}{T_2} = \frac{2\pi}{\sqrt{3}} \times \frac{3}{2\pi} = \sqrt{3}$$

Since  $\frac{T_1}{T_2} = \sqrt{3}$  is not rational, there is no common period for this signal and the signal is not periodic.

ii. (5 points) A signal can be neither energy signal nor power signal.

False. This is because if the signal is an energy signal then, it will have 0 power.

And if the signal is not a power signal, it means power = 0, and there will be definitely be finite energy making it an energy signal.

iii. (5 points) Let  $f(t) * g(t)$  denote the convolution of two signals,  $f(t)$  and  $g(t)$ . Then,

$$f(t)[\delta(t) * g(t)] = [f(t)\delta(t)] * g(t)$$

$$\begin{aligned} \text{LHS} &= f(t) (\delta(t) * g(t)) = f(t) g(t) \\ &\quad \downarrow \\ &\quad \text{identity} \\ &\quad \text{element} \end{aligned}$$

$$\begin{aligned} \text{RHS} &= (f(t)\delta(t)) * g(t) \\ &= (f(0)\delta(t)) * g(t) \\ &= f(0)g(t) \neq \text{LHS} \end{aligned}$$

The statement is false.

(b) (10 points) Determine if the following system is an LTI system. Explain your answer.

$$y(t) = \frac{x(t-1)}{t} + x(t-2) \quad (1)$$

Showing Linearity

$$\text{RHS} = S(ax + b\tilde{x}) = \frac{ax(t-1) + b\tilde{x}(t-1)}{t} + ax(t-2) + b\tilde{x}(t-2)$$

$$\text{LHS} = aS(x) + bS(\tilde{x}) = \frac{ax(t-1)}{t} + ax(t-2) + \frac{b\tilde{x}(t-1)}{t} + b\tilde{x}(t-2)$$

$$= \frac{ax(t-1) + b\tilde{x}(t-1)}{t} + ax(t-2) + b\tilde{x}(t-2)$$

= RHS

$\therefore$  The system is linear.

Showing time invariance

$$\text{RHS} = y(t-1) = \frac{x(t-1-1)}{t-1} + x((t-1)-2)$$

$$= \frac{x(t-2)}{t-1} + x(t-3)$$


$$\text{LHS} = \text{when input is } x(t-1) = \frac{x(t-1-1)}{t} + x(t-2-1)$$

$$= \frac{x(t-2)}{t} + x(t-3) \neq \text{RHS}$$

The system is not time invariant.

False since system is linear but not Time invariant.

- (c) (10 points) For signals  $f(t)$  and  $g(t)$  plotted below, graphically compute the convolution signal  $h(t) = f(t) * g(t)$ . To receive partial credit, you may show  $h(0)$ ,  $h(1/4)$  and  $h(5/8)$  in the graph when illustrating the convolution using the "flip and drag" technique.

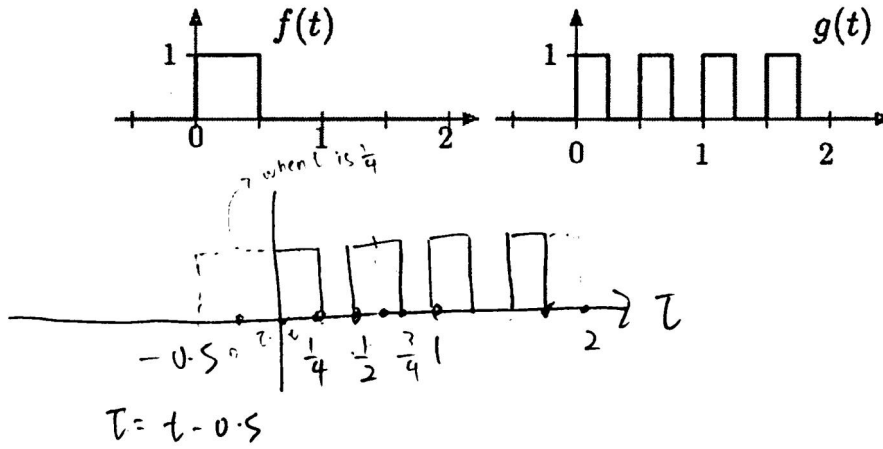

$$0 \leq t \leq \frac{1}{4}$$

$$h(t) = \int_0^t 1(d\tau) = t$$

$$\frac{1}{4} < t < 2$$

$$h(t) = \frac{1}{4}$$

$$2 \leq t \leq 2\frac{1}{4}$$


$$h(t) = -t + \frac{9}{8}$$

$$t > 2\frac{1}{4}$$

$$h(t) = 0$$

$$t < 0$$


$$h(t) = 0$$

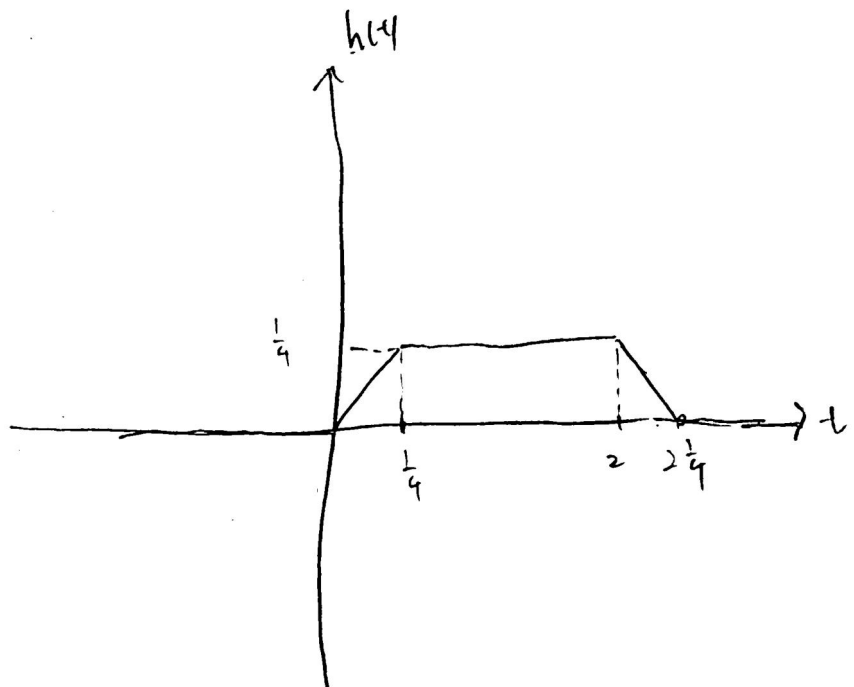



2. LTI Systems (20 points).

Consider the following LTI system  $S$ :

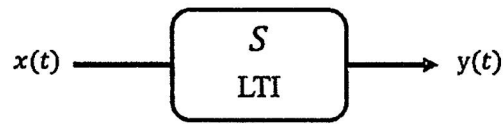

Consider an input signal  $x_1(t) = e^{-2t}u(t-2)$ . It is given that

$$\begin{aligned} x_1(t) &\xrightarrow{S} y_1(t) \\ \frac{dx_1(t)}{dt} &\xrightarrow{S} -2y_1(t) + e^{-2t}u(t) \end{aligned}$$

(a) (4 points) Show that:

$$\frac{dx_1(t)}{dt} = -2x_1(t) + e^{-2t}\delta(t-2)$$

$$\text{LHS} = \frac{d}{dt} e^{-2t} u(t-2) = -2 \underbrace{e^{-2t}}_u \underbrace{u(t-2)}_v = -2y_1(t) + e^{-2t}u(t)$$

$$u = e^{-2t} \quad v = u(t-2)$$

$$\frac{du}{dt} = -2e^{-2t} \quad \frac{dv}{dt} = \delta(t-2)$$

$$v \frac{du}{dt} + u \frac{dv}{dt} = -2e^{-2t} u(t-2) + \delta(t-2) e^{-2t}$$

$$= -2x_1(t) + \delta(t-2) e^{-2t} = \text{RHS (shown)}$$

(b) (10 points) Find the impulse response  $h(t)$  of  $S$ .



*Hint:* Since we have not provided  $S$ , we cannot straightforwardly input an impulse into the system and measure the output. One approach is to solve for  $h(t)$  by writing the output of  $S$  in terms of a convolution when the input is  $dx_1(t)/dt$ , i.e.,

$$\frac{dx_1(t)}{dt} * h(t)$$

$$\left( -2x_1(t) + \delta(t-2)e^{-2t} \right) * h(t) = -2x_1(t) * h(t) + (\delta(t-2)e^{-2t}) * h(t)$$

$$x_1(t) * h(t) = -2x_1(t) * h(t) + (\delta(t-2)e^{-2t}) * h(t)$$

$$(e^{-4}\delta(t-2) * h(t)) = e^{-2t}u(t)$$

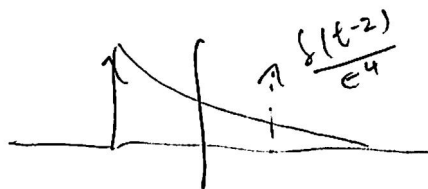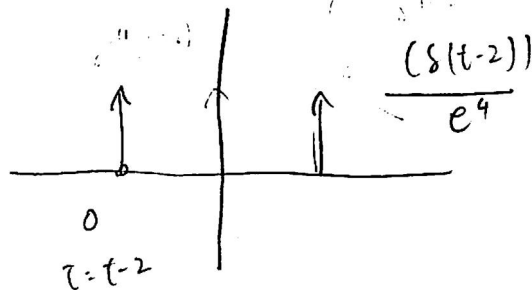

1

$$h(t) = e^4 (e^{-2t} (u(t-2)))$$

$$= e^{-2t+4} (u(t-2))$$

$$\frac{\sqrt{4}}{2} \frac{\sqrt{3}}{3} \frac{\sqrt{2}}{2} \frac{\sqrt{1}}{2}$$

- (c) (6 points) Consider a new system,  $S_2$ , whose impulse response is  $h_2(t) = e^{-3t}u(t+3)$ . Find this system's output to the following input signal:

$$x_2(t) = \cos\left(\frac{\pi}{4}t\right)\delta(t-1)$$

$$x_2(t) = \cos\left(\frac{\pi}{4}t\right)\delta(t-1)$$

$$= \cos\left(\frac{\pi}{4}\right)\delta(t-1)$$

$$\begin{aligned} x_2(t) * h_2(t) &= \cos\left(\frac{\pi}{4}\right)\delta(t-1) * \left(e^{-3t}u(t+3)\right) \xrightarrow{\text{delay via convolution}} \\ &= \left(\frac{1}{\sqrt{2}}\delta(t-1)\right) * \left(e^{-3t}u(t+3)\right) \\ &= \frac{1}{\sqrt{2}} \left( e^{-3(t-1)} u((t-1)+3) \right) \\ &= \frac{1}{\sqrt{2}} \left( e^{-3t+3} u(t+2) \right) // \end{aligned}$$

3. Fourier Series (20 points).

(a) (10 points) Let the Fourier Series coefficients of  $f(t)$  be denoted  $f_k$ , and the Fourier Series coefficients of  $g(t)$  denoted  $g_k$ . Let  $T_0$  be the period of  $f(t)$ . If  $g(t) = f(a(t-b))$ , where  $a > 0$ , show that

$$g_k = e^{-j2\pi \frac{ab}{T_0} k} f_k.$$

$$\omega_0 = \frac{2\pi}{T_0}$$

$$f(t) = \sum_{k=-\infty}^{\infty} f_k e^{jk\omega_0 t}$$

$$= \frac{2\pi}{T_0} \frac{t}{a}$$

$$= \frac{2\pi a}{T_0}$$

$$f(at) = \sum_{k=-\infty}^{\infty} f_k e^{jk \left(\frac{2\pi}{T_0}\right) a t}$$

$$= \sum_{k=-\infty}^{\infty} f_k e^{jk \left(\frac{2\pi a}{T_0}\right) t}$$

$$f(a(t-b)) = \sum_{k=-\infty}^{\infty} f_k e^{jk \left(\frac{2\pi a}{T_0}\right) (t-b)}$$

$$= \sum_{k=-\infty}^{\infty} \left[ f_k e^{-jk \left(\frac{2\pi a b}{T_0}\right)} \right] e^{jk \left(\frac{2\pi a}{T_0}\right) t}$$

$$g(t) = \sum_{k=-\infty}^{\infty} g_k e^{jk \left(\frac{2\pi a}{T_0}\right) t}$$

$$g_k = f_k e^{-jk \left(\frac{2\pi a b}{T_0}\right)} \quad (\text{shown})$$

- (b) (10 points) Let the Fourier Series coefficients of  $x(t)$  and  $y(t)$  be  $x_k$  and  $y_k$  respectively, with respective periods  $T_1$  and  $T_2$ . We define  $f(t) = \alpha_1 x(t) + \alpha_2 y(t)$  with non-zero  $\alpha_1, \alpha_2$ , with period  $T_0 = m_1 T_1 = m_2 T_2$ . What are the Fourier Series coefficients  $f_k$  in terms of  $x_k$  and  $y_k$ ?

$$x(t) = \sum_{k=-\infty}^{\infty} x_k e^{jk \left(\frac{2\pi}{T_1}\right) t}$$

$$y(t) = \sum_{k=-\infty}^{\infty} y_k e^{jk \left(\frac{2\pi}{T_2}\right) t}$$

$$f(t) = \sum_{k=-\infty}^{\infty} f_k e^{jk \left(\frac{2\pi}{m_1 T_1}\right) t}$$

$$= \sum_{k=-\infty}^{\infty} f_k e^{j \left(\frac{k}{m_1}\right) \left(\frac{2\pi}{T_1}\right) t}$$

$$f(t) = \alpha_1 \sum_{k=-\infty}^{\infty} x_k e^{jk \left(\frac{2\pi}{T_1}\right) t} + \alpha_2 \sum_{k=-\infty}^{\infty} y_k e^{jk \left(\frac{2\pi}{T_2}\right) t}$$

$$f(t) = \sum_{k=-\infty}^{\infty} f_k e^{jk \left(\frac{2\pi}{m_2 T_2}\right) t}$$

$$= \sum_{k=-\infty}^{\infty} f_k e^{j \left(\frac{k}{m_2}\right) \left(\frac{2\pi}{T_2}\right) t}$$

$$f(t) = \alpha_1 x \left(\frac{k}{m_1}\right) + \alpha_2 y \left(\frac{k}{m_2}\right)$$

4. Fourier Transform (25 points).

Consider the signal

$$x(t) = \text{sinc}(2t)$$

and let the Fourier transform of  $x(t)$  be denoted  $X(j\omega)$ . We are interested in calculating the area under the curve of  $x(t)$ .

(a) (10 points) Prove that the following relationship holds.

$$\int_{-\infty}^{\infty} x(t) dt = \underline{X(j\omega)|_{\omega=0}}$$

$$\int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt$$

$$F(\text{sinc}(t)) = \text{rect}\left(\frac{\omega}{2\pi}\right)$$

$$F(\text{sinc}(2t)) = \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\text{when } \omega = 0, X(j\omega) = \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\text{By Fourier transform: } = \frac{1}{2}$$

$$\int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt = X(j\omega)$$

when  $\omega = 0$ ,

$$\int_{-\infty}^{\infty} x(t) e^0 dt = X(j\omega)|_{\omega=0} \text{ (shown)}$$

(b) (5 points) Use the result of part (a) to calculate:

$$\int_{-\infty}^{\infty} x(t) dt$$

for  $x(t) = \text{sinc}(2t)$ .

$$F(\text{sinc}(t)) = \text{rect}\left(\frac{\omega}{2\pi}\right)$$

$$F(\text{sinc}(2t)) = \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\text{when } \omega=0, \quad X(j\omega) = \frac{1}{2} \left( \text{rect}\left(\frac{0}{4\pi}\right) \right)$$

$$= \frac{1}{2} \cdot 1$$

$$= \frac{1}{2}$$

(c) (5 points) Consider the following system:

$$y(t) = e^{-j\omega_0 t} x(t)$$

Let  $x(t) = \text{sinc}(2t)$  and consider only  $\omega_0 > 0$ . Are there any values of  $\omega_0$  for which

$$\int_{-\infty}^{\infty} y(t) dt = 0$$


and if so, what value(s) of  $\omega_0$  does this hold for?

$$F(x(t)) = \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$F(e^{-j\omega_0 t} x(t)) = \frac{1}{2} \text{rect}\left(\frac{\omega + \omega_0}{4\pi}\right)$$

$$\int_{-\infty}^{\infty} y(t) e^{jk\omega t} dt = \frac{1}{2} \text{rect}\left(\frac{\omega + \omega_0}{4\pi}\right)$$

When  $\omega = 0$ , for  $Y(j\omega)$  to be 0,  
 $\omega_0$  has to be greater  
 than  $2\pi$ .

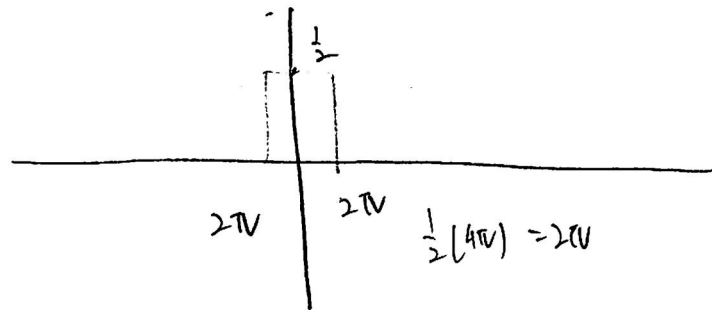

Ans:  $\omega_0 > 2\pi$



(d) (5 points) Consider the following system:

$$y(t) = x(t) + \alpha \text{rect}(t)$$

Let  $x(t) = \text{sinc}(2t)$ . Are there any values of  $\alpha$  for which

$$\int_{-\infty}^{\infty} y(t) dt = 0$$

and if so, what value(s) of  $\alpha$  does this hold for?

$$\frac{1}{2} \text{rect}\left(\frac{w}{4\pi}\right)$$

$$F(\alpha \text{rect}(t)) = a \text{sinc}\left(\frac{w}{2\pi}\right)$$

$$Y(jw) = \frac{1}{2} \text{rect}\left(\frac{w}{4\pi}\right) + a \text{sinc}\left(\frac{w}{2\pi}\right)$$

$$= \frac{1}{2} \text{rect}\left(\frac{w}{4\pi}\right) + \frac{a \sin\left(\pi \left(\frac{w}{2\pi}\right)\right)}{\pi \left(\frac{w}{2\pi}\right)}$$

$$= \frac{1}{2} \text{rect}\left(\frac{w}{4\pi}\right) + \frac{a \sin\left(\frac{w}{2}\right)}{\frac{w}{2}} \quad \begin{array}{l} \text{L'Hopital} \\ \left( \frac{\frac{a}{2} \cos\left(\frac{w}{2}\right)}{\frac{1}{2}} \right) \end{array}$$

when  $w=0$ ,  $Y(jw) = \frac{1}{2}(1) + a \cos\left(\frac{0}{2}\right)$

when  $a = -\frac{1}{2}$

$$\frac{1}{2} + a = 0 \implies a = -\frac{1}{2}$$

the integral holds

$$\begin{array}{l} \frac{2a}{2} \cos\left(\frac{w}{2}\right) \\ \downarrow \\ = a \cos\left(\frac{w}{2}\right) \end{array}$$

when  $w=0$ ,  
 $a \cos\left(\frac{w}{2}\right) = a$

**Bonus** (6 points) Suppose  $x(t) = \cos(\omega_0 t)$  is an eigenfunction of an LTI system  $S$  for any  $\omega_0$ , and  $S$  cannot be defined as  $S[x(t)] = ax(t)$  for some constant  $a$ . Is the system  $S$  causal? Justify your answer.

*This is an extra piece of paper to show your work. If you use this space for a question, for that question, please write "Refer to page 16."*