

# ECE 102 Midterm

Bryan Wong

TOTAL POINTS

**92.5 / 106**

QUESTION 1

Signal/System/Convolution 35 pts

1.1 (a)i 5 / 5

✓ + 5 pts Correct

+ 4 pts Correctly computed periods of both signals and its ratio, but with insufficient justification

+ 2 pts Attempted to justify the signal is not periodic, with insufficient or incorrect justification

+ 3.5 pts Stated no common period, without computing or mentioning the ratio of periods

+ 0 pts Incorrect answer or no Justification

1.2 (a)ii 5 / 5

✓ + 5 pts Correct

+ 0 pts Incorrect answer or no/incorrect justification

+ 2 pts Insufficient Reasoning to justify the answer

1.3 (a)iii 3 / 5

+ 5 pts Correct answer

✓ + 3 pts One side is simplified correctly

+ 1.5 pts Correctly used the sifting property on the right hand side

+ 1.5 pts Correctly used the sampling property on the left hand side

+ 0 pts Incorrect answer or reasoning

1.4 (b) 10 / 10

✓ + 10 pts Correct

+ 5 pts Correctly identify the linearity property

+ 0 pts Incorrect

1.5 (c) 10 / 10

✓ + 10 pts Correct  $h(t)$

+ 8 pts Correct  $h(t)$  for  $t < 2$

+ 8 pts Correct shape of  $h(t)$  but incorrect amplitude

+ 2 pts correct  $h(0)$

+ 2 pts correct  $h(1/4)$

+ 2 pts correct  $h(5/8)$

+ 2 pts Correct  $h(t)$  for  $t > 2$

+ 0 pts Incorrect

QUESTION 2

LTI Systems 20 pts

2.1 (a) 4 / 4

✓ - 0 pts Correct

- 1 pts minor mistakes

- 2 pts half correct

- 4 pts incorrect

2.2 (b) 8 / 10

✓ + 3 pts use LTI properties.

✓ + 3 pts correct convolution equation/multiplication in frequency domain.

+ 2 pts correct convolution results/inverse FT results.

✓ + 2 pts correct time shift for the last step.

+ 0 pts incorrect

2.3 (c) 6 / 6

✓ - 0 pts Correct.

- 1 pts constant term incorrect.

- 2 pts time shift incorrect.

- 2 pts inverse FT incorrect.

- 3 pts missing/incorrect exponential/unit step function.

- 4 pts calculate in frequency domain with wrong FT.

- 5 pts incorrect calculation with a correct convolution equation.

- 6 pts incorrect.

QUESTION 3

Fourier Series 20 pts

3.1 (a) 10 / 10

✓ - 0 pts Correct

- 0.5 pts Did not explicitly use the angular frequency  $\omega_g = a\omega_0$ , or  $T_g = T_0/a$  in the Fourier Series.

- 5 pts Partially correct

- 7.5 pts Incorrect

- 10 pts See comment

- 10 pts No substantive answer

3.2 (b) 5 / 10

- 0 pts Correct

✓ - 1 pts Did not mention divisibility of  $k$  by  $m_1$  and  $m_2$

- 6.5 pts Incorrect

- 10 pts See comment

✓ - 2 pts Missing alphas or different scale factor (that does not contain  $t$ , since it shouldn't)

✓ - 2 pts  $k$  or  $m_k$  instead of  $k/m$

- 10 pts No substantive answer

QUESTION 4

Fourier Transform 25 pts

4.1 (a) 10 / 10

✓ + 10 pts Correct

+ 5 pts Attempted to use inverse FT formula and did many correct algebraic steps.

+ 3 pts Wrote equation of Fourier Transform but did not substitute  $\omega = 0$

+ 2 pts Attempted integral incorrectly, or other attempted math with Fourier transform (either of  $\text{rect}/\text{sincs}$ , or inverse FT).

+ 2 pts Explanation of property with no proof, or applying it to  $\text{sinc}(2t)$  incorrectly.

+ 0 pts Incorrect or no answer

4.2 (b) 5 / 5

✓ + 5 pts Correct, with Fourier Transform taken

correctly.

+ 4 pts Took the Fourier Transform correctly, did not calculate an area or did so incorrectly.

+ 2 pts Did not compute Fourier transform of  $\text{sinc}(2t)$  correctly, or other incorrect algebra.

+ 0 pts No appropriate work for partial credit or answer.

4.3 (c) 5 / 5

✓ + 5 pts Correct,  $\omega_0 > 2\pi$ , or correct based on their answer to part (b).

+ 4.5 pts Mistake on the amount of shift (e.g.,  $4\pi$  instead of  $2\pi$ ); or did not plug in  $\omega = 0$ ; or did not specify the shift precisely).

+ 3.5 pts Recognize the FT is time-shifted, did not correctly deduce when  $\text{rect}$  is 0 or other incorrect algebra.

+ 3 pts Recognized the FT is time-shifted.

+ 2 pts Incorrect answer due to incorrect rationale, or work appropriate for partial credit (such as showing some conditions where it's zero).

+ 0 pts No appropriate work for partial credit, or no answer.

4.4 (d) 5 / 5

✓ + 5 pts Correct,  $\alpha = -1/2$ , or correct based on their answer to parts b or c. We required you to simplify to a number since we asked for a value -- it wasn't sufficient to keep things in terms of  $\text{rects}$  and  $\text{sincs}$ .

+ 4 pts Would have had the correct answer if recalled  $\text{sinc}(0) = 1$  or other minor algebraic constant.

+ 3 pts Didn't simplify  $\text{rect}(0)$  or  $\text{sinc}(0)$ , but had the correct (or reasonable) equation; or other related error.

+ 2 pts Incorrect answer due to not treating the  $\text{rect} \leftrightarrow \text{sinc}$  term correctly, or other partial work.

+ 1 pts Attempt to simplify the integral with incorrect arguments; or other incorrect / incomplete arguments.

+ 0 pts No appropriate work for partial credit, or no answer.

QUESTION 5

**5 Bonus 1.5 / 6**

- **0 pts** Correct for intended interpretation

- **6 pts** No answer or incorrect justification or no justification

- **3 pts** Partially correct

- **5 pts** If "any" was interpreted as "some" rather than "every": correct example of some causal system

S

✓ - **6 pts** See comment

+ **1.5** Point adjustment

● Highlighted expression is correct. What's below is insufficient.

**ECE102, Fall 2019**  
Department of Electrical and Computer Engineering  
University of California, Los Angeles

**Midterm**  
Prof. J.C. Kao  
TAs: W. Feng, J. Lee & S. Wu

UCLA True Bruin academic integrity principles apply.  
Open: Two cheat sheets allowed.  
Closed: Book, computer, internet.  
2:00-3:50pm.  
Wednesday, 13 Nov 2019.

State your assumptions and reasoning.  
No credit without reasoning.  
Show all work on these pages.  
There is an extra blank space on page 16 to show your work if you run out of space on any questions.

Name: Bryan Wong

Signature: 

ID#: 805-111-517

Problem 1	_____ / 35
Problem 2	_____ / 20
Problem 3	_____ / 20
Problem 4	_____ / 25
BONUS	_____ / 6 bonus points
Total	_____ / 100 points + 6 bonus points

1. Signal and System Properties + Convolution (35 points).

(a) (15 points) Determine if each of the following statements is true or false. Briefly explain your answer to receive full credit.

i. (5 points)  $x(t) = \cos(\sqrt{3}t) + \sin(-3t)$  is a periodic signal.

$$x_1(t) = \cos(\sqrt{3}t) \quad T_1 = \frac{2\pi}{\sqrt{3}}$$

$$x_2(t) = \sin(-3t) \quad T_2 = \frac{2\pi}{3}$$

$$\frac{T_2}{T_1} = \frac{2\pi}{3} \left( \frac{\sqrt{3}}{2\pi} \right) = \frac{\sqrt{3}}{3} = \frac{1}{\sqrt{3}} \notin \text{Rational number}$$

**False**

Since the ratio of the phases of  $\cos(\sqrt{3}t)$  and  $\sin(-3t)$  is irrational,  $x(t)$  is not a periodic signal.


ii. (5 points) A signal can be neither energy signal nor power signal.

Energy signal  $\rightarrow$  signal has finite energy

Power signal  $\rightarrow$  signal has infinite energy but a finite power

**True**

Example of neither:  $r(t)$

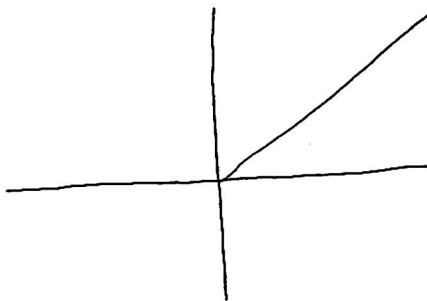

$$E_x = \infty$$

$$P_x = \frac{1}{2T} \int_{-T}^T |r(t)|^2 dt = \infty$$

iii. (5 points) Let  $f(t) * g(t)$  denote the convolution of two signals,  $f(t)$  and  $g(t)$ . Then,

$$f(t)[\delta(t) * g(t)] = [f(t)\delta(t)] * g(t)$$

$$\begin{aligned} \text{LHS: } & f(t)[\delta(t) * g(t)] \\ & = f(t)g(t) \end{aligned}$$

$$\begin{aligned} \text{RHS: } & [f(t)\delta(t)] * g(t) \\ & = [f(t) * g(t)][\delta(t) * g(t)] \quad \left. \begin{array}{l} \downarrow \\ \text{distributivity} \end{array} \right\} \\ & = [f(t) * g(t)]g(t) \\ & = f(t)g(t) * [g(t)]^2 \end{aligned}$$

$\neq$  LHS

False

(b) (10 points) Determine if the following system is an LTI system. Explain your answer.

$$y(t) = \frac{x(t-1)}{t} + x(t-2) \quad (1)$$

Shift input:  $y_\alpha(t) = \frac{x(t-1-\alpha)}{t} + x(t-2-\alpha)$

Shift output:  $y(t-\alpha) = \frac{x(t-\alpha-1)}{t-\alpha} + x(t-\alpha-2)$

$$\neq y_\alpha(t)$$

Therefore,  $y(t)$  is not time invariant and not an LTI

Is  $y(t)$  linear?


$$S(ax(t) + b\tilde{x}(t)) = \frac{ax(t-1) + b\tilde{x}(t-1)}{t} + ax(t-2) + b\tilde{x}(t-2)$$

$$aS(x(t)) + bS(\tilde{x}(t)) = \frac{ax(t-1)}{t} + ax(t-2) + \frac{b\tilde{x}(t-1)}{t} + b\tilde{x}(t-2)$$




$$= S(ax(t) + b\tilde{x}(t))$$

$\therefore y(t)$  is linear


- (c) (10 points) For signals  $f(t)$  and  $g(t)$  plotted below, graphically compute the convolution signal  $h(t) = f(t) * g(t)$ . To receive partial credit, you may show  $h(0)$ ,  $h(1/4)$  and  $h(5/8)$  in the graph when illustrating the convolution using the "flip and drag" technique.

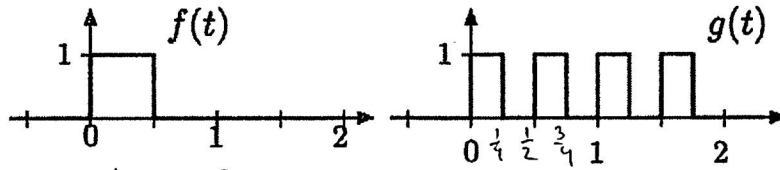

Flip and drag  $f(t)$  across  $g(t)$ :

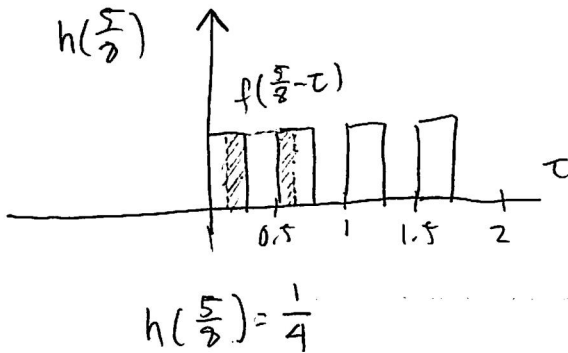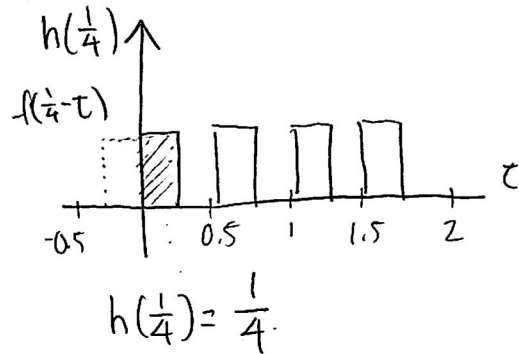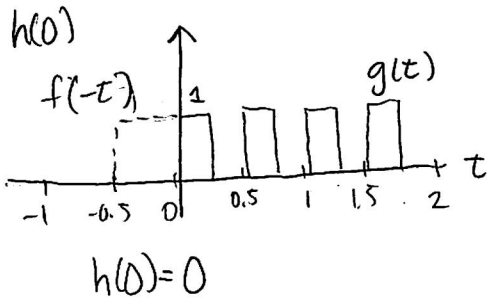


$$h(t) = f(t) * g(t)$$

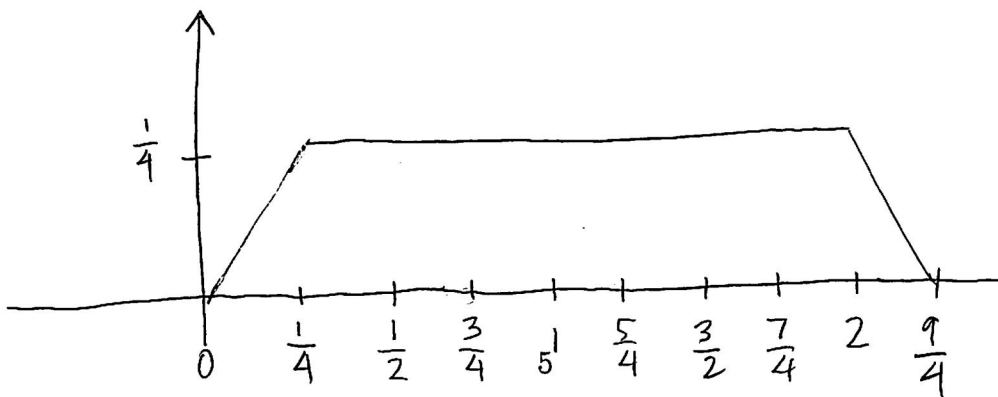



2. LTI Systems (20 points).

Consider the following LTI system  $S$ :

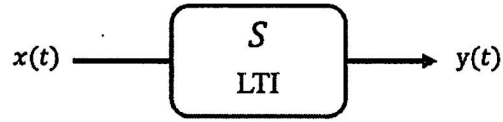

Consider an input signal  $x_1(t) = e^{-2t}u(t-2)$ . It is given that

$$\begin{aligned} x_1(t) &\xrightarrow{S} y_1(t) \\ \frac{dx_1(t)}{dt} &\xrightarrow{S} -2y_1(t) + e^{-2t}u(t) \end{aligned}$$

(a) (4 points) Show that:

$$\frac{dx_1(t)}{dt} = -2x_1(t) + e^{-2t}\delta(t-2)$$

$$x_1(t) = e^{-2t}u(t-2)$$

$$\frac{dx_1(t)}{dt} = -2 \left[ e^{-2t}u(t-2) \right] + e^{-2t} \frac{d}{dt} [u(t-2)]$$

$$\boxed{\frac{dx_1(t)}{dt} = -2x_1(t) + e^{-2t}\delta(t-2)}$$

(b) (10 points) Find the impulse response  $h(t)$  of  $S$ .

*Hint:* Since we have not provided  $S$ , we cannot straightforwardly input an impulse into the system and measure the output. One approach is to solve for  $h(t)$  by writing the output of  $S$  in terms of a convolution when the input is  $dx_1(t)/dt$ , i.e.,

$$\frac{dx_1(t)}{dt} * h(t)$$

$$\frac{dx_1(t)}{dt} \xrightarrow{S} -2y_1(t) + e^{-2t}u(t) = y_2(t)$$

$$y_1(t) = x_1(t) * h(t) \quad y_2(t) = \frac{dx_1(t)}{dt} * h(t)$$

$$-2y_1(t) + e^{-2t}u(t) = (-2x_1(t) + e^{-2t}\delta(t-2)) * h(t)$$

$$-2(x_1(t) * h(t)) + e^{-2t}u(t) = -2(x_1(t) * h(t)) + e^{-2t}\delta(t-2) * h(t)$$

$$e^{-2t}u(t) = e^{-2t}\delta(t-2) * h(t)$$


$$u(t) = \delta(t-2) * h(t)e^{2t}$$

$$u(t) = h(t-2)e^{2t-4}$$

$$e^{4-2t}u(t) = h(t-2)$$

$$h(t) = e^{4-2(t+2)}u(t+2)$$

$$\boxed{h(t) = e^{2t}u(t+2)}$$

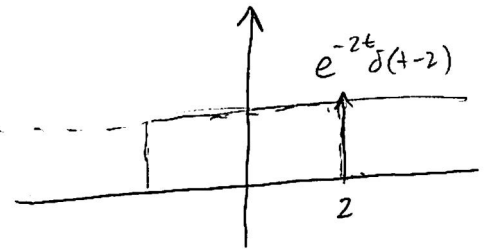

- (c) (6 points) Consider a new system,  $S_2$ , whose impulse response is  $h_2(t) = e^{-3t}u(t+3)$ . Find this system's output to the following input signal:


$$x_2(t) = \cos\left(\frac{\pi}{4}t\right)\delta(t-1)$$

$$\begin{aligned}y(t) &= x_2(t) * h_2(t) \\&= \left(\cos\left(\frac{\pi}{4}t\right)\delta(t-1)\right) * \left(e^{-3t}u(t+3)\right) \\&= \frac{\sqrt{2}}{2}\delta(t-1) * e^{-3t}u(t+3) \\&= \frac{\sqrt{2}}{2}e^{-3(t-1)}u(t-1+3) \\&= \frac{\sqrt{2}}{2}e^{-3t+3}u(t+2)\end{aligned}$$

3. Fourier Series (20 points).

- (a) (10 points) Let the Fourier Series coefficients of  $f(t)$  be denoted  $f_k$ , and the Fourier Series coefficients of  $g(t)$  denoted  $g_k$ . Let  $T_0$  be the period of  $f(t)$ . If  $g(t) = f(a(t-b))$ , where  $a > 0$ , show that

$$g_k = e^{-j2\pi \frac{ab}{T_0} k} f_k.$$

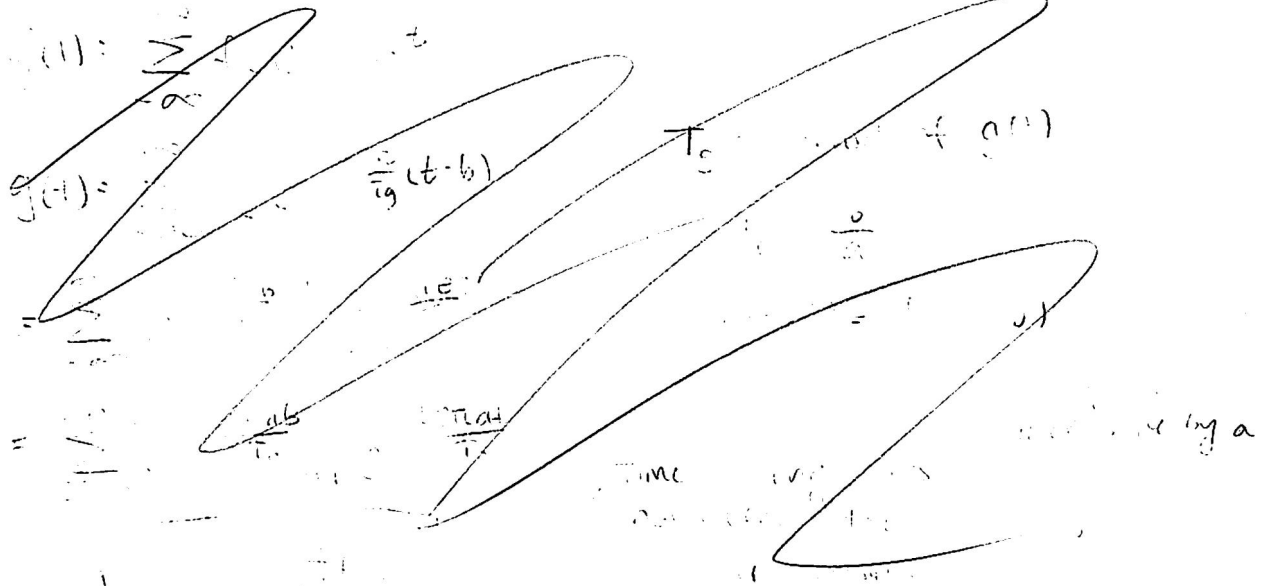

$$f(t) = \sum_{-\infty}^{\infty} f_k e^{jk2\pi \frac{t}{T_0}}$$

$$T_g = \frac{T_0}{a}$$

$a > 0$ , time contracts

$$g(t) = f(a(t-b)) = \sum_{-\infty}^{\infty} f_k e^{jk2\pi \frac{a(t-b)}{T_0}}$$

$$= \sum_{-\infty}^{\infty} \left( e^{-j2\pi \frac{ab}{T_0} k} f_k \right) e^{jk2\pi \frac{at}{T_0}} = \sum_{-\infty}^{\infty} g_k e^{jk2\pi \frac{at}{T_0}}$$

$$\boxed{g_k = e^{-j2\pi \frac{ab}{T_0} k} f_k}$$

- (b) (10 points) Let the Fourier Series coefficients of  $x(t)$  and  $y(t)$  be  $x_k$  and  $y_k$  respectively, with respective periods  $T_1$  and  $T_2$ . We define  $f(t) = \alpha_1 x(t) + \alpha_2 y(t)$  with non-zero  $\alpha_1, \alpha_2$ , with period  $T_0 = m_1 T_1 = m_2 T_2$ . What are the Fourier Series coefficients  $f_k$  in terms of  $x_k$  and  $y_k$ ?

$$x_1(t) = \sum_{-\infty}^{\infty} x_k e^{jk2\pi t / T_1}$$

$$T_1 = \frac{T_0}{m_1} \quad T_2 = \frac{T_0}{m_2}$$

$$y_1(t) = \sum_{-\infty}^{\infty} y_k e^{jk2\pi t / T_2}$$

$$f(t) = \alpha_1 \sum_{-\infty}^{\infty} x_k e^{jk2\pi t m_1 / T_0} + \alpha_2 \sum_{-\infty}^{\infty} y_k e^{jk2\pi t m_2 / T_0}$$

$$= \sum_{-\infty}^{\infty} (\alpha_1 e^{m_1} x_k + \alpha_2 e^{m_2} y_k) e^{jk2\pi t / T_0}$$

$$\boxed{f_k = \alpha_1 e^{m_1} x_k + \alpha_2 e^{m_2} y_k}$$

4. **Fourier Transform** (25 points).

Consider the signal

$$x(t) = \text{sinc}(2t)$$

and let the Fourier transform of  $x(t)$  be denoted  $X(j\omega)$ . We are interested in calculating the area under the curve of  $x(t)$ .

(a) (10 points) Prove that the following relationship holds.

$$\int_{-\infty}^{\infty} x(t) dt = X(j\omega)|_{\omega=0}$$

$$X(j\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt$$

if  $\omega=0$

$$X(j\omega)|_{\omega=0} = \int_{-\infty}^{\infty} x(t) e^0 dt$$

$$= \int_{-\infty}^{\infty} x(t) dt$$

QED

(b) (5 points) Use the result of part (a) to calculate:

$$\int_{-\infty}^{\infty} x(t) dt$$

for  $x(t) = \text{sinc}(2t)$ .

$$\text{sinc}(t) \Leftrightarrow \text{rect}\left(\frac{\omega}{2\pi}\right)$$

$$\text{sinc}(2t) \Leftrightarrow \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\int_{-\infty}^{\infty} x(t) dt = \frac{1}{2} \text{rect}\left(\frac{0}{4\pi}\right)$$

$$= \boxed{\frac{1}{2}}$$

(c) (5 points) Consider the following system:

$$y(t) = e^{-j\omega_0 t} x(t)$$

Let  $x(t) = \text{sinc}(2t)$  and consider only  $\omega_0 > 0$ . Are there any values of  $\omega_0$  for which

$$\int_{-\infty}^{\infty} y(t) dt = 0$$

and if so, what value(s) of  $\omega_0$  does this hold for?

$$\text{sinc}(2t) \Leftrightarrow \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$e^{-j\omega_0 t} \text{sinc}(2t) \Leftrightarrow \frac{1}{2} \text{rect}\left(\frac{\omega + \omega_0}{4\pi}\right)$$

$$\int_{-\infty}^{\infty} y(t) dt = 0 \text{ for } \frac{\omega + \omega_0}{4\pi} \leq -\frac{1}{2} \text{ or } \frac{\omega + \omega_0}{4\pi} \geq \frac{1}{2}$$

$$\omega + \omega_0 \leq -2\pi$$

$$\omega + \omega_0 \geq 2\pi$$

$$\omega_0 \leq -2\pi - \omega$$

$$\omega_0 \geq 2\pi - \omega$$

$$\omega = 0$$

$$\int_{-\infty}^{\infty} y(t) dt = 0 \text{ for } \omega_0 \leq -2\pi \text{ or } \omega_0 \geq 2\pi$$



(d) (5 points) Consider the following system:

$$y(t) = x(t) + \alpha \text{rect}(t)$$

Let  $x(t) = \text{sinc}(2t)$ . Are there any values of  $\alpha$  for which

$$\int_{-\infty}^{\infty} y(t) dt = 0$$

and if so, what value(s) of  $\alpha$  does this hold for?

$$\text{sinc}(2t) \Leftrightarrow \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\text{sinc}(2t) + \alpha \text{rect}(t) \Leftrightarrow \frac{1}{2} \text{rect}\left(\frac{\omega}{4\pi}\right) + \alpha \text{sinc}\left(\frac{\omega}{2\pi}\right)$$

For  $\omega=0$

$$\frac{1}{2} \text{rect}(0) + \alpha \text{sinc}(0) = 0$$

$$\frac{1}{2} + \alpha = 0$$

$$\boxed{\alpha = -\frac{1}{2}}$$

Assuming  
 $\text{sinc}(0) = 1 \dots$

**Bonus (6 points)** Suppose  $x(t) = \cos(\omega_0 t)$  is an eigenfunction of an LTI system  $S$  for any  $\omega_0$ , and  $S$  cannot be defined as  $S[x(t)] = ax(t)$  for some constant  $a$ . Is the system  $S$  causal? Justify your answer.

$$x(t) = \cos(\omega_0 t) = \frac{1}{2} [e^{j\omega_0 t} + e^{-j\omega_0 t}]$$

output

$$y(t) = A(\omega_0 t) \cos(\omega_0 t)$$

where  $A$  is some  
scaling function

$$\text{For } t = -\pi, y(-\pi) = A(-\pi\omega_0) \cos(-\pi)$$

$$= -A(-\pi\omega_0)$$

$S$  is not causal

*This is an extra piece of paper to show your work. If you use this space for a question, for that question, please write "Refer to page 16."*